

KONISK FASE BÅND LDPE

Materiale:

Low Density Polyethylen LDPE (PE01)

Karakteristik:

Standard konisk fase bånd, som anvendes til produktion af gipsplader. Egenskaber meget lig PVC.

Kemisk bestandighed:	Middel
Mekaniske egenskaber:	Middel
Slagstyrke:	God
UV- og vejrbestandighed:	Middel
Service temperatur:	-20 °C til +45 °C
Overfladehårdhed:	Shore D 45
Elasticitetsmodul:	200 MPa
Vandoptagelse:	0 %
Funktionalitet:	
- Risiko for brud:	Høj
- Forlængelse:	Høj
- Slidstyrke:	Ring
- Sammenføjning af brud:	Kan udføres på flere måder, f.eks. med metal klamper eller lim

Norm:

**Dimension:**

Standard:	0,5 * 1,5 * 65 mm
	0,5 * 1,6 * 65 mm
	0,5 * 1,8 * 65 mm
	0,5 * 1,9 * 65 mm
	0,5 * 2,0 * 65 mm
	0,5 * 2,25 * 65 mm

Specialiteter: Andre dimensioner efter ønske

Farve:

Standard:	Natur, hvid, sort, rød og blå
Specialiteter:	Speciel farver mod tillæg

Minimum ordre:

1.000 m

Emballage:

Standard:	Ruller op til ~ 450 meter på Ø76 mm pap rør Hver ruller pakkes separat i speciel papkasse
-----------	--

Typiske anvendelser:

- Produktion af gipsplader

TAPER EDGE BELTS LDPE

Material:

Low Density Polyethylene LDPE (PE01)

Characteristics:

Standard taper belt used throughout the world in the production of plaster boards. Similar properties to PVC taper belts.

Chemical resistance:	Medium
Mechanical properties:	Medium
Impact resistance:	Good
UV- & weather resistance:	Medium
Service temperature:	-20°C to +45°C
Surface hardness:	Shore D 45
Flexural modulus:	200 MPa
Moisture absorption:	0 %
Functionality:	
- Tendency to break:	High
- Elongation:	High
- Abrasion resistance:	Low
- Connection of breaks:	Can be done by several methods, such as clamping (metal clamps) or cluing

Norms:

**Dimension:**

Standard:	0,5 * 1,5 * 65 mm
	0,5 * 1,6 * 65 mm
	0,5 * 1,8 * 65 mm
	0,5 * 1,9 * 65 mm
	0,5 * 2,0 * 65 mm
	0,5 * 2,25 * 65 mm

Specialities: Other dimensions on request

Colour:

Standard:	Natural
Specialities:	Special colours at an additional charge

Minimum order:

1.000 m


Packaging:

Standard:	Coils up to ~ 450 m on Ø76 mm carton support. Each coil is packed in a carton box
-----------	--

Applications:

- Plasterboard production

Dimension (fort.):

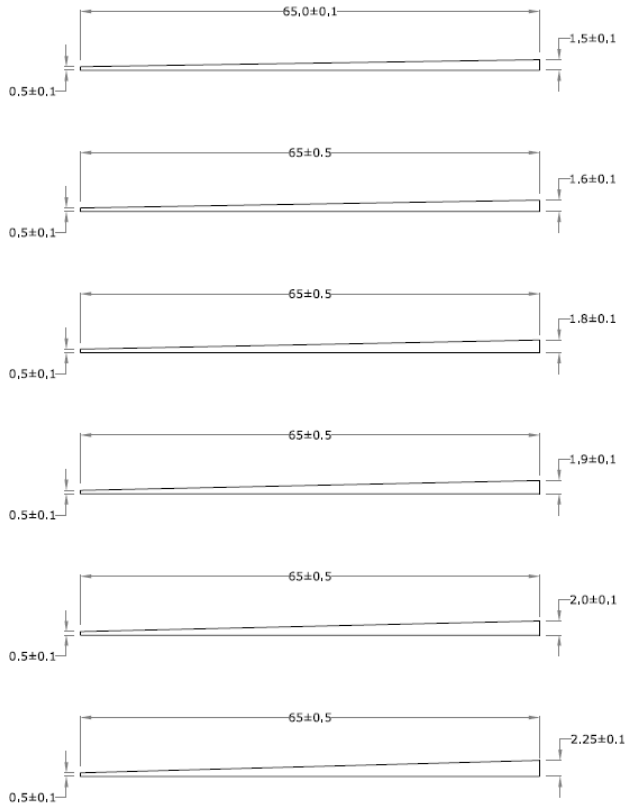

Dimension (cont.):

