

## KONISK FASE BÅND PA 11

## TAPER EDGE BELTS PA 11

**Materiale:**

Polyamid 11 (PA05)

**Karakteristik:**

Super fleksibel konisk fase bånd med mekaniske og kemiske egenskaber, som er væsentlig bedre end LDPE og PVC. Levetiden på tapen er flere gange bedre end LDPE og PVC, idet fleksibilitet og andre mekaniske egenskaber forbliver uændret i tapens levetid.

Kemisk bestandighed:	God
Mekaniske egenskaber:	Fremragende
Slagstyrke:	Fremragende
UV- og vejrbestandighed:	Fremragende
Servicetemperatur:	-40 °C til +80 °C
Overfladehårdhed:	Shore D 53
Elasticitetsmodul:	190 MPa
Vandoptagelse:	< 1,0 %
Funktionalitet:	
- Risiko for brud:	Lav
- Forlængelse:	Lav
- Slidstyrke:	Høj
- Sammenføjning af brud:	Kan udføres på flere måder, f.eks. med metal klamper, lim eller HF svejsning (Ammson PW 1200 svejsemaskine).

Norm:

**Dimension:**

Standard:	0,5 * 1,5 * 65 mm
	0,5 * 1,6 * 65 mm
	0,5 * 1,8 * 65 mm
	0,5 * 1,9 * 65 mm
	0,5 * 2,0 * 65 mm
	0,5 * 2,25 * 65 mm

Specialiteter: Andre dimensioner fremstilles efter ønske.

**Farve:**

Standard:	Natur
Specialiteter:	Speciel farver mod tillæg

**Minimum ordre:**

1.000 m

**Emballage:**

Standard: Ruller op til ~ 450 meter på Ø76 mm pap rør  
Hver ruller pakkes separat i speciel pakke

**Typiske anvendelser:**

- Produktion af gipsplader

**Material:**

Polyamide 11(PA05)

**Characteristics:**

Super flexible high quality taper edge belt with superior mechanical and chemical properties compared to LDPE and PVC. The lifetime is several times longer than that of LDPE and PVC, as flexibility and other important properties are kept unchanged throughout the lifetime.

Chemical resistance:	Good
Mechanical properties:	Excellent
Impact resistance:	Excellent
UV- & weather resistance:	Excellent
Service temperature:	-40°C to +80°C
Surface hardness:	Shore D 53
Flexural modulus:	190 MPa
Moisture absorption:	< 1,0 %
Functionality:	
- Tendency to break:	Low
- Elongation:	Low
- Abrasion resistance:	High
- Connection of breaks:	Can be done by several methods, such as clamping (metal clamps), cluing or HF welding (Ammson PW 1200 welder)

Norms:

**Dimension:**

Standard:	0,5 * 1,5 * 65 mm
	0,5 * 1,6 * 65 mm
	0,5 * 1,8 * 65 mm
	0,5 * 1,9 * 65 mm
	0,5 * 2,0 * 65 mm
	0,5 * 2,25 * 65 mm

Specialities: Other dimensions in different sizes on request.

**Colour:**

Standard:	Natural
Specialities:	Special colours at an additional charge

**Minimum order:**

1.000 m


**Packaging:**

Standard: Coils up to ~ 450 m on Ø76 mm carton support.  
Each coil is packed in a carton box

**Applications:**

- Plasterboard production

### Dimension (fort.):

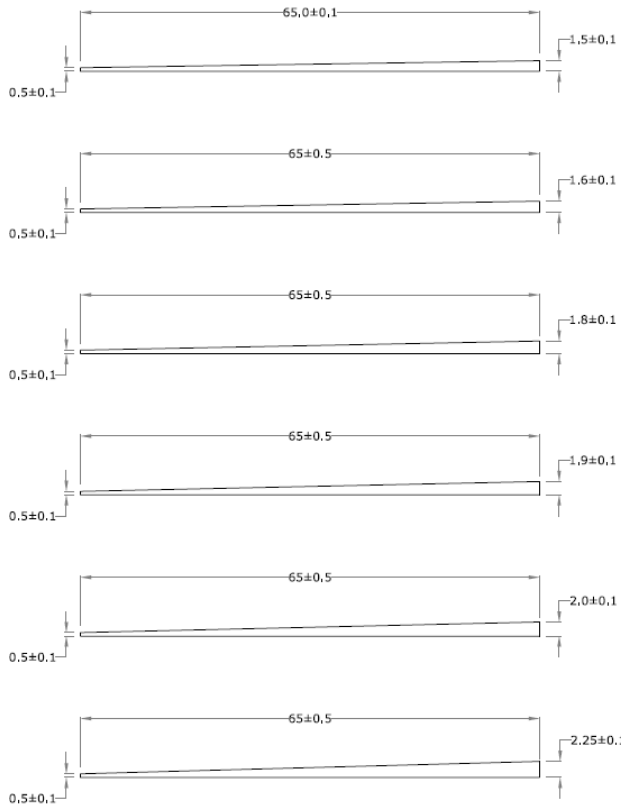

### Dimension (cont.):

