



WIRE FIX - PP SPIRALSKÅRET SLANGE

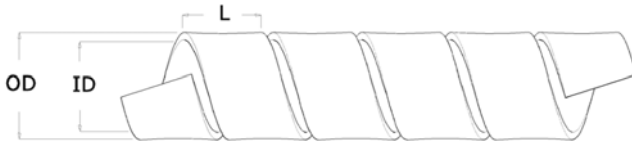

WIRE FIX - PP SPIRAL CUT HOSE

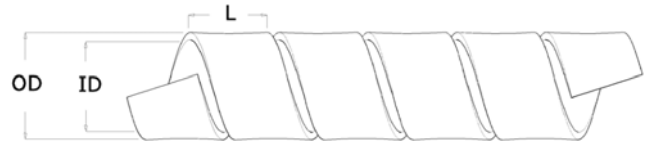

Materiale:

Polypropylen Copolymer (PP-C) – (PP08)

Karakteristik:

Wire Fix - PP holder styr på ledninger, kabler og slanger på kontoret, i produktionen eller i hjemmet.

Den beskytter slanger og kabler med slid og slag og sikre let rengøring under og rundt om Wire Fix - PP.

Wire Fix – PP kan let installeres and afinstalleres og genbruges gentagende gange.

Kemisk bestandighed: God bestandig overfor de fleste organiske opløsningsmidler og kemikalier

UV- og vejrbestandighed: Dårlig, men kan forbedres ved til sætning af additiver såsom kønrøg

Arbejdstemperatur: -30 °C til +80 °C

Overfladehårdhed: Shore D 66

Norm: - Godkendt til fødevarer kontakt jf. FDA 21 CFR 177.1520 (USA) og EU direktiver
- Godkendt til legetøj jf. EN 71-3:1994



Dimension:

Standard: OD: 10 mm / ID: 8 mm / L: 8 mm
OD: 12 mm / ID: 10 mm / L: 8 mm
OD: 14 mm / ID: 12 mm / L: 8 mm
OD: 20 mm / ID: 18 mm / L: 8 mm

Specialiteter: Andre dimensioner fremstilles efter ønske

Farve:

Standard: Hvid og sort

Specialiteter: Speciel farver mod tillæg

Minimum ordre:
500 m

Emballage:

Standard: Ruller af 10 meter i plastpose

Specialiteter: Efter forespørgsel

Se endvidere separat oversigt over emballage muligheder

Typiske anvendelser:



Material:

Polypropylene Copolymer (PP-C) – (PP08)

Characteristics:

Wire Fix - PP keeps computer, electrical cables and hoses organized in the office, in the factory or at home.

It provides superior protection to fragile hoses or cables in the factory or in the field and easy cleaning.

Wire Fix - PP can easily be installed and remove for multi time use.

Chemical resistance: Good resistant to most organic solvents and chemicals

UV- & weather resistance: Poor, but can be improved by additives such as carbon black

Service temperature: -30°C to +80°C

Surface hardness: Shore D 66

Norms: - Approved for food contact acc. to FDA 21 CFR 177.1520 (USA) and EU directives
- Approved for toys acc. to EN 71-3:1994



Dimension:

Standard: OD: 10 mm / ID: 8 mm / L: 8 mm
OD: 12 mm / ID: 10 mm / L: 8 mm
OD: 14 mm / ID: 12 mm / L: 8 mm
OD: 20 mm / ID: 18 mm / L: 8 mm

Specialities: Other dimensions and profiles in sizes and shapes

Colour:

Standard: White and black

Specialities: Special colours at an extra charge

Minimum order:
500 m

Packaging:

Standard: Coils of 10 meters

Specialities: Other length on request.

Please see separate datasheet for packaging options

Typical applications:

